




SOMOGYI ELEKTRONIC®
— since 1981 —

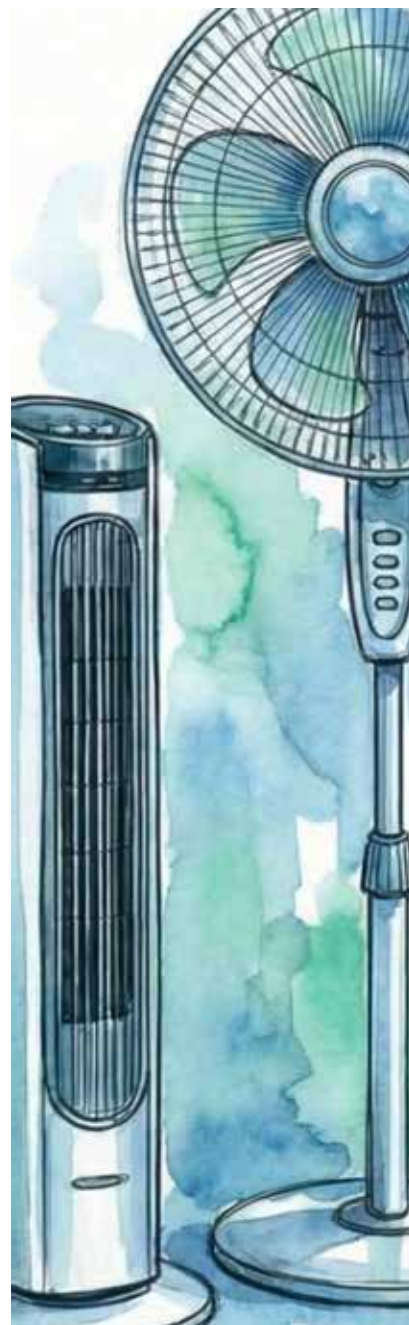

COOLING TECHNOLOGY 2026

www.somogyinagyker.hu



MOBILSPLIT12

MOBILE SPLIT AIR CONDITIONER

- local air conditioning unit
- **ideal for rooms up to 40 m**
- **4 operating modes: cooling, heating, fan and dehumidification**
- LED display and 24-hour on/off timer
- easy-to-install wall brackets that fit most existing window types
- all functions can be controlled by remote control or touch buttons
- **can be controlled remotely from your phone using the Smart Life app (WiFi 2,4 GHz)**
- **rated cooling/heating efficiency: 3,5 kW**
- max. drying capacity: 28 l/24 h
- remote control power supply: 2xAAA (1.5 V) batteries, not included
- power supply: 220-240 V~ 50 Hz
- indoor unit dimensions: 430 x 730 x 320 mm
- outdoor unit dimensions: 492 x 460 x 263 mm
- total product weight: net 34.5 kg
- **energy efficiency class: cooling: A / heating: A+**



CAUTION!

The unit is filled with R32 gas.
The unit must be installed, used and stored in a room with a floor area of at least 4 m².





MONOBLOCK12

MONOBLOCK AIR CONDITIONER

- local air conditioning unit
- new concept monoblock air conditioner
- modern, simple, streamlined design
- **ideal for rooms up to 30 m²**
- **4 operating modes: cooling, heating, fan and dehumidification**
- 1000 W PTC auxiliary electric heating
- large air outlet for convenient use
- no outdoor unit for easy installation and cost savings
- LED display and 24-hour on/off timer
- pleasantly low noise level of 39 dB(A) in quiet mode
- environmentally friendly fluorine-free refrigerant (R290)
- evaporator system - less condensation in cooling mode
- water level indicator and automatic shut-off function
- durable metal housing
- all functions can be controlled remotely
- **can be controlled remotely from your phone using the Smart Life app (WiFi 2.4 GHz)**
- complete installation kit: wall template + screw set + outdoor covers + indoor covers + pipe lining plate + sealing tape + wall bracket + mounting bracket
- cooling capacity: 3.5 kW / 12000 BTU/h
- heating capacity: 2.93 kW / 10,000 BTU/h
- nominal power consumption, cooling / heating: 1340 W / 815 W
- maximum drying capacity: 28 l/24 h
- noise level: 60 dB(A)
- remote control power supply: 2xAAA (1.5 V) batteries, not included
- power supply: 220-240 V~ / 50 Hz
- dimensions: 100 x 58.5 x 20.5 cm
- weight: net 45 kg
- **energy efficiency class cooling: A / heating: A+**



MONOBLOCK8

MONOBLOCK AIR CONDITIONER

- **ideal for rooms up to 20 m²**
- cooling capacity : 2,45 kW / 8000 BTU/h
- heating capacity : 2,63 kW / 8000 BTU/h
- nominal power consumption, cooling / heating: 940 W / 730 W
- maximum drying capacity: 19 l/24 h
- noise level: 58 dB(A)
- dimensions: 100 x 58,5 x 20,5 cm
- weight: net 44.5 kg
- **energy efficiency class cooling: A / heating: A+**



ATTENTION!

The appliance is filled with propane gas (R290).
The appliance must be installed, used and stored in a room with a floor area of at least 15-16 m²!



ACH 12000

COOLING-HEATING MOBILE AIR CONDITIONER

- local air conditioning equipment
- **ideal for 26 m² premises**
- **4 operating modes: cooling, fan, drying, heating**
- on and off timer (24 h)
- all functions can be controlled remotely
- **can be controlled remotely from the phone with the Smart Life application**
(WiFi 2.4 GHz)
- **cooling / heating power:**
3.5 kW / 3.3 kW
- maximum drying capacity: 36 l / 24 h
- remote control power supply: 2 x 1.5 V (AAA) batteries, not included
- power supply: 220-240 V~ / 50 Hz / 1370 W
- dimensions: 44 x 82 x 35 cm
- weight: net 27 kg
- **energy efficiency class:**
cooling: A / heating: A+



WARNING!

The appliance is filled with propane gas (R290). The device must be installed, used and stored in an area of at least 11,8 m²!

ACM9000N

MOBILE AIR CONDITIONER

- local air conditioning unit
- **ideal for rooms up to 18 m²**
- **4 operating modes: AUTO, cooling, drying, fan**
- clear user interface
- on/off timer (24 hours)
- switchable air deflection
- all functions can be controlled remotely
- easy-to-clean air filters
- easy to move and roll
- accessory drainage pipe
- **cooling capacity: 2.6 kW / 9000 BTU/h**
- maximum drying capacity: 24 l/24 h
- noise level: 65 dB(A)
- refrigerant: R290
- remote control power supply: 1xCR2025 (3 V) battery, included
- power supply: 220-240 V~ / 50 Hz / 950 W
- dimensions: 320 x 680 x 348 mm
- weight: net 22 kg
- **energy efficiency class: A**



CAUTION!

The appliance is filled with propane gas (R290). The appliance must be installed, used and stored in a room with a floor area of at least 7.9 m².

WSL 4

WINDOW INSULATION FOR MOBILE AIR CONDITIONING

- **it helps keep the cold in and the heat out with an open window**
- easy installation with Velcro
- can be fitted to all tilt and turn window types
- **connection of outlet hose via zipper**
- durable material
- length: 4 m
- self-adhesive Velcro included
- excellent for use with mobile air conditioners



LH 301

AIR COOLER

It cools the air flowing through it by evaporating cold water, thus ensuring a fresh, pleasant feeling. The air speed is controlled by a 3-speed fan, and the air distribution is ensured by air deflectors that can be turned on and off.

- built-in water tank (3 l)
- **freezer packs included** (LH301A)
- replaceable vaporizer mat (LH 301/T)
- adjustable ventilator output (3 stages)
- **switchable air blades**
- ergonomic carrying handle
- rolling on castors, lockable
- power supply: 230 V~ / 50-60 Hz / **80 W**
- dimensions: 25 x 58 x 28 cm

air cooler



LH301A

ICE PACK FOR LH301, LHP400D AIR COOLERS
(2 PCS)



LH 300/T

VAPORIZER MAT FOR LH 300

LH 301/T

VAPORIZER MAT FOR LH 301



LHP400D

AIR COOLER WITH REMOTE CONTROL

It cools the air flowing through it by evaporating cold water, thus ensuring a fresh, pleasant feeling. The air speed is controlled by a 3-speed fan, and the air distribution is ensured by air deflector slats that can be turned on and off.

- can be controlled with touch buttons and a remote control
- switchable environmentally friendly air cooling by evaporating water
- water tank size: 3,2 l
- **supplied with 2 ice packs** (LH301A)
- cserélhető evaporator pad (LHP400DT)
- 3 fan speeds
- **3 fan modes: normal, natural wind, sleep**
- switchable air diffusion
- switch-off timer: 0,5 - 15,5 hours
- easy to roll on wheels, brakeable
- remote control power supply: 1x3 V (CR2025) button cell, included
- power supply: 220-240 V~ / 50-60 Hz / **80 W**
- unit weight: 3,5 kg



LHP400DT

VAPORIZER MAT FOR LHP400D





PVR 50

FLOOR FAN

- nominal fan blade diameter: 50 cm
- adjustable output (3 stages)
- adjustable tilt angle of head (90°)
- **metal blades**
- massive chrome plated protective grid
- power supply: 230 V~ / 50 Hz / **120 W**
- dimensions: 60 x 58 x 25 cm

PVR 35

FLOOR FAN

- nominal fan blade diameter: 35 cm
- power supply: 230 V~ / 50 Hz / **60 W**
- dimensions: 46 x 46 x 20 cm




CMF65

CENTRIFUGAL HUMIDIFIER FAN

- nominal blade diameter: 64 cm
- 41 water tank capacity
- infinitely variable humidification control: 0-5 L/hour
- air delivery: 145 m³ /minute
- effective humidification: 10 m
- 3 aerodynamically designed cast metal blades
- 3 fan speeds
- easily convertible to oscillating mode
- adjustable head angle
- easy to move with handles and wheels
- power supply: 220-240 V~ / 50-60 Hz / **260 W**
- height: 1,75 m
- assembled dimensions: 72 x 175 x 56 cm
- assembled empty weight: 19,5 kg

mist fan

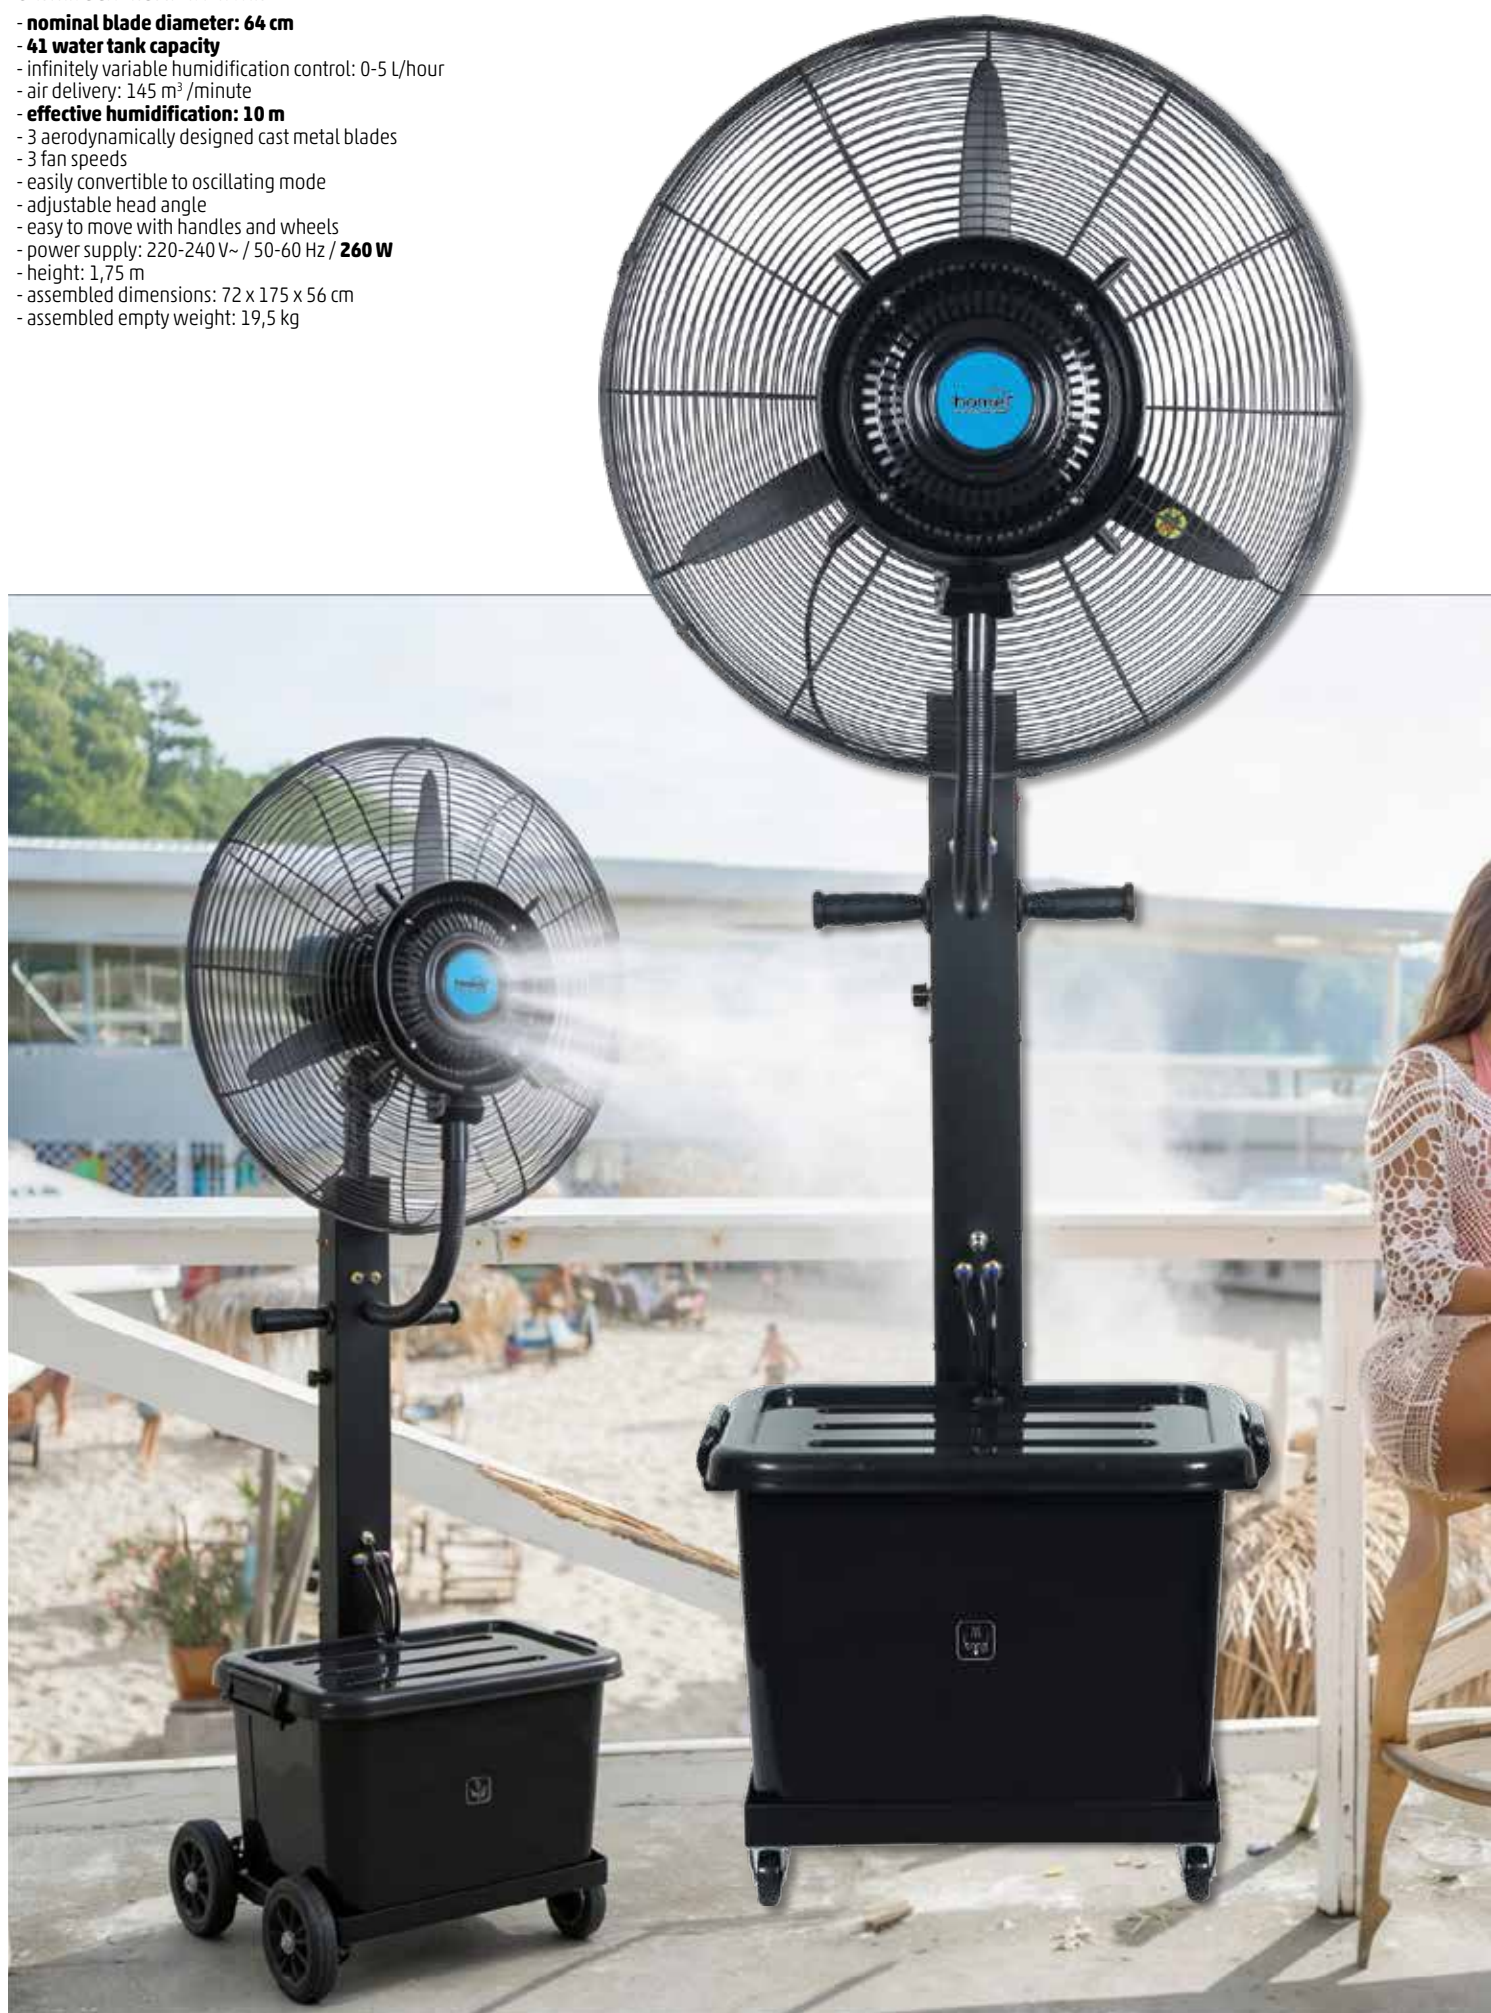

SFM43BK

MIST FAN

- nominal blade diameter: 40 cm
- 3 fan blades
- can be controlled with electronic foil buttons or remote control
- 3 gears
- normal, natural wind and night mode
- switchable oscillation
- switch-off time 0.5-7.5 hours
- adjustable head tilt angle
- **top-fillable water tank, 2.8 l**
- **humidification adjustable in 3 levels, which can also be used independently**
- humidification max. 220 g / hour
- easy to roll on wheels
- remote control power supply 2 x 1.5 V (AAA) batteries, not included
- power supply: 220-240 V~ / 50-60 Hz / **75 W**
- dimensions: 43 x 127 x 40 cm



home
by sonosby

mist fan





TVI-455

ÁLLÓ FÉM VENTILÁTOR

- nominal fan blade diameter: 40 cm
- standing metal fan
- 4 metal blades
- adjustable output (3 stages)
- oscillation
- adjustable height
- power supply: 220-240 V~ / 50-60 Hz / 50 W



SFI 45

STANDING METAL FAN

- nominal fan blade diameter: 45 cm
- adjustable height (108 - 143 cm)
- adjustable output (3 stages)
- adjustable tilt angle of head (90°)
- metal blades
- dense grid
- power supply: 230 V~ / 50 Hz / 100 W
- dimensions: 56 x 143 cm



SFS 40

STANDING METAL FAN

- nominal fan blade diameter: 40 cm
- adjustable height (90 - 120 cm)
- adjustable output (3 stages)
- switchable oscillation (85°)
- adjustable tilt angle of head (+/- 15°)
- metal blades
- power supply: 230 V~ / 50 Hz / 50 W
- dimensions: 40 x 120 cm

SFT42R

STANDING FAN WITH REMOTE CONTROL

- **nominal blade diameter: 40 cm**
- controlled by touch buttons or remote control
- DC motor
- **8 speed settings**
- 9 fan blades
- 1-12 hour shut-off timer
- switchable oscillation
- tiltable head
- magnetically attachable remote control
- white LED display
- room temperature display
- remote control power supply: 1 x 3 V (CR2025) button cell battery, included
- power supply: 220-240 V~ / 50-60 Hz / **25 W**
- dimensions: 47,5 x 137 x 40 cm
- weight: 4,5 kg



SFT40R

STANDING FAN WITH REMOTE CONTROL 3IN1

- **nominal blade diameter: 40 cm**
- can be controlled with touch buttons or remote control
- can be installed in 3 different heights (78/105/132 cm)
- 5 transparent fan blades
- adjustable head tilt angle
- **white LED display, can be turned off**
- 4 gears + night function
- switchable oscillation
- switch-off timing 1-9 hours
- remote control power supply: 1 x 3 V (CR2025) button battery, included
- power supply: 220-240 V~ / 50-60 Hz / **60 W**
- dimensions: 46 x (78/105/132) x 40 cm



SFP 40

STANDING FAN WITH REMOTE CONTROL

- **nominal fan blade diameter: 40 cm**
- **adjustable height (110 - 130 cm)**
- adjustable output (3 stages)
- wind function (2 levels)
- switchable oscillation (90°)
- timer (30 minutes - 7,5 hours)
- **all functions are remote controllable**
- power supply: 230 V~ / 50 Hz / **45 W**
- dimensions: 40 x 130 cm





SF40WH

STANDING FAN

- **nominal blade diameter: 40 cm**
- with mechanical push buttons
- 3 speeds
- switchable oscillation
- adjustable head angle
- adjustable height: 103 - 125 cm
- power supply:
220-240 V~ / 50-60 Hz / **45 W**
- dimensions: 62 x 62 x 125 cm
- weight: 2,5 kg
- white

SF40BK

- black



FS40-21M

STANDING FAN

- nominal blade diameter: 40 cm
- adjustable height (94-124 cm)
- convenient switching of stages with a rotary switch on the motor
- adjustable power (3 stages)
- switchable oscillation (80°)
- adjustable head tilt angle (+15°)
- power supply: 230 V~ / 50 Hz / **40 W**
- dimensions: 70 x 70 x 124 cm



standing fan



SF16C

STANDING FAN

- nominal blade diameter: 40 cm
- mechanical push buttons
- 3 speed settings
- switchable oscillation
- adjustable head angle
- power supply: 220-240 V~ / 50-60 Hz / **50 W**
- dimensions: Ø29 x Ø41 x 114 cm

TWFR100B

TOWER FAN

- controlled by touch buttons and remote control
- large display size
- 3 speeds
- **normal, natural wind and night mode**
- switch-off timing 0,5-7,5 hours
- **switchable oscillation**
- power supply: 220-240 V~ / 50-60 Hz / **45 W**
- size: 245 x 790 x 245 mm
- weight: 2,7 kg



TWF822

TOWER FAN

- **easy to control with a rotary knob**
- 3 speeds
- **switchable oscillation**
- easy to move with ergonomic carrying handle
- low space requirement fan
- power supply: 220-240 V~ / 50-60 Hz / **45 W**
- size: Ø280 x 790 mm
- weight: 2,75 kg



TWFR100C

TOWER FAN WITH REMOTE CONTROL

- controlled by touch buttons and remote control
- large display
- 4 speed settings
- normal, natural breeze, night and automatic modes
- **colour LED strip for mode indicator**
- **current temperature display**
- **current humidity display**
- **accurate time display**
- on/off timer 1 - 12 hours
- switchable oscillation
- power supply: 220-240 V~ / 50-60 Hz / **60 W**
- remote control power supply: 2x1.5 V (AAA) batteries, not included
- size: 260 x 130 x 1003 mm



TWFR78

TOWER FAN

- can be controlled with touch buttons and remote control
- large display
- room temperature
- 3 gears
- **normal and night mode**
- **switch-off timing 1-12 hours**
- switchable oscillation
- power supply: 220-240 V~ / 50-60 Hz / **45 W**
- size: Ø215 x 780 mm
- weight: 2,3 kg



tower fan

WFM 2

WALL FAN

- **nominal blade diameter: 18 cm**
- 3 fan blades
- **rotary and cord switches**
- 3 speeds
- **oscillation option**
- adjustable tilting
- screws and dowels included
- power supply: 220 - 240 V~ / 50 Hz / **30 W**
- dimensions: Ø26 x 38,8 x 31-35 cm

TF30WH

DESKTOP FAN

- nominal blade diameter: 30 cm
- 3 fan blades
- white plastic paddles
- metal grid
- 3 speeds
- switchable oscillation
- adjustable head angle
- with rubber feet
- power supply: 220-240 V~ / 50-60 Hz / **40 W**
- dimensions: Ø35 x 47 x 25 cm



TF20TURBO

TABLE AND WALL FAN

- can be placed on a table or mounted on a wall
- nominal blade diameter: 20 cm
- 3 fan blades
- mechanical rotary switch
- 3 speed settings
- 120° tiltable head
- power supply: 220-240 V~ / 50-60 Hz / **30 W**
- dimensions: 29 x 13 x 26 cm



TVI-335

METAL DESKTOP FAN

- nominal blade diameter: 30 cm
- chrome-plated table design
- 4 metal fan blades
- 3 speeds
- oscillation
- power supply: 220-240 V~ / 50-60 Hz / **45 W**



TF 23 TURBO

DESK AND WALL FAN

- nominal fan blade diameter: 23 cm
- 3 fan speeds, rotary switch
- 90° tiltable head
- accessory studs and screws for wall mounting
- power supply: 230 V~ / 50 Hz / **50 W**
- dimensions: 26 x 28 x 17 cm



TF 10 USB

DESK FAN, USB

- nominal fan blade diameter: 10 cm
- 1 fan speed
- 4 pcs transparent plastic blades
- power supply from USB socket: 5 V / 500 mA / **2.5 W**
- recommended adapter: SA 24USB, NV 2100 USB, not included
- with 1,4 m USB cable
- dimensions: 14,5 x 15 x 9,5 cm
- black



TF 10 USB/WH

- white



CLF 10/BK

BATTERY POWERED CLIP-ON FAN


- nominal blade diameter: 14cm
- optional clipping on a shelf (max. 25mm) or placement on a table top
- 3 fan speeds
- head adjustable in any direction
- electronic push button
- indicator LED
- Li-ion, 18650, 1800mAh battery
- 3 to 6 hours operating time (at high / low power)
- ~3 hours charging time **with the fan working while charged**
- USB cable included
- dimensions: 15 x 19 x 13 cm



HF9C

HAND-HELD, RECHARGEABLE FAN

- nominal blade diameter: 9 cm
- can be used hand-held or on the desk holder
- 4 transparent plastic blades
- 3 fan speed
- accessory USB A - C charging wire (75 cm)
- accessory Li-ion battery: 18650/3,7 V / 1200 mAh
- charging, switched-on state indicator LEDs
- output: **4 W**
- noise level: 56 dB(A)
- dimensions: Ø10,5 x 22 x 6,5 cm



CB 23

COOLER BAG

- **22 liter capacity**
- output: 45 W
- even 12 - 18 °C cooling relative to the ambient temperature
- **12 V power supply**
- climate class: N
- dimensions: 40 x 39,5 x 23 cm

cooler bag



CHB28

COOLER BAG WITH HEATING FUNCTION

- **28 liters capacity**
- cooling: 15 - 18 °C below ambient temperature
- heating: 50-65 °C
- **two power supply options: 12 V cigarette lighter socket or 230 V~ / 50 Hz mains**
- cooling: max. 57 W
- heating: max. 48 W
- **connected power cables (1.8 m)**
- cable storage compartments
- climate class: N
- energy class: F (on a scale of A-G)
- external dimensions: 405 x 502 x 305 mm
- dimensions: 401 x 505 x 309 mm



URC 2000AC/SL

UNIVERSAL REMOTE CONTROL FOR AIR CONDITIONERS

2000 operating codes for more than **10000 types**.
It can be used for almost all types of air conditioners.
It expands your device with new, useful features.

- always displays the temperature of the room
- exact time is constantly displayed
- timer programmes; switching on and off
- intelligent rapid heating and rapid cooling modes
- **SMART sleeping mode** with delayed temperature control
- **automatic operating code search**
 - manual setup by brand
 - clear, well-readable, large scale display
 - steady blue LED background light
 - supplied with **wall bracket**
- power supply: 2 x 1,5 V (AAA) batteries, not included
- dimensions: 165 x 55 x 20 mm



Home Comfort, Home Pro, Carrier, Daewoo, Daikin, Electrolux, Fujitsu, Funai, Goldstar, Gree, Haier, Hisense, Hitachi, Hyundai, LG, Midea, Mitsubishi, Panasonic, Samsung, Sanyo, Sharp, Toshiba, Whirlpool...

URCAC

UNIVERSAL REMOTE CONTROL FOR AIR CONDITIONERS

- **replaces the original remote control**
- **very easy to use**, even for elderly people
- designed for basic functions: on/off - cooling/heating - fan speed - temperature
- automatic or manual code search
- **very fast pairing**
 - two-colour LED indicator
- operates most common air conditioner types
- approximately 400 brands and 3,000 models
- power supply: CR2032 (3V) button cell battery, included
- dimensions: 38 x 60 x 12 mm





SOMOGYI ELEKTRONIC®
— since 1981 —

Somogyi Elektronik Ltd.

3. Gesztenyefa Street,
Győr 9027, Hungary
Telephone: +36 96 512-512
Fax: +36 96 512-522
E-mail: somogyi@somogyi.hu
Web: www.somogyinagyker.hu

Competent Court of Registration:
Győr-Moson-Sopron County
Court of Registration Company
Registry No.: 08-09-002824

We reserve the right to make technical alterations,
and products may differ
from those shown on the photos.

Some of the images in our publications are created using
artificial intelligence and are for illustrative purposes
only, and may differ slightly from the actual products.
The product information and actual product photos are
the guiding principles when making a purchase decision
in all cases, and we are not responsible for any possible
differences.

WWW.SOMOGYINAGYKER.HU

